

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 June 2004 (17.06.2004)


PCT

(10) International Publication Number  
**WO 2004/051095 A1**

- (51) International Patent Classification<sup>7</sup>: **F16B 2/06**,  
F16L 3/24, B25B 5/10
- (21) International Application Number:  
PCT/GB2003/005184
- (22) International Filing Date:  
28 November 2003 (28.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0227816.6 29 November 2002 (29.11.2002) GB  
0312125.8 28 May 2003 (28.05.2003) GB
- (71) Applicant (for all designated States except US): **TYCO  
EUROPEAN METAL FRAMING LIMITED** [GB/GB];  
Victoria Road, Leeds LS11 5UG (GB).
- (72) Inventors; and  
(75) Inventors/Applicants (for US only): **KLIPPEL, Simon**  
[GB/GB]; Twincott, Old Scriven, Knaresborough, North  
Yorkshire HG5 9DU (GB). **GILL, Neil, Frank** [GB/GB];  
No 10 Wrose Avenue, Shipley, West Yorkshire, BD18 1NS  
(GB).
- (74) Agents: **GRAY, James et al.**; Withers & Rogers, Goldings  
House, 2 Hays Lane, London SE1 2HW (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: CLAMP

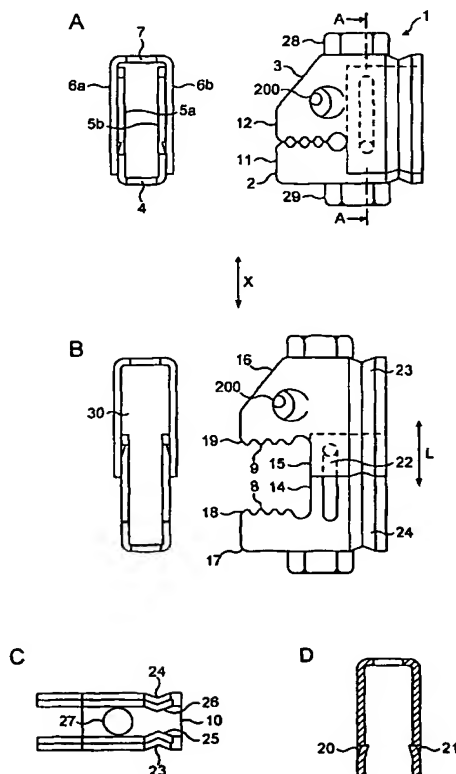

(57) Abstract: A clamp comprises: a first jaw (2) and a second jaw (3) having opposing contact surfaces (8, 9) which are relatively substantially linearly displaceable between a position of minimum separation and a position of maximum separation, wherein in use the opposing contact surfaces (8, 9) contact the lower surface and upper surface respectively of a structural element, wherein the first jaw (2) incorporates a first aperture remote from the contact surface and adapted to receive a suspension element or fastener; one or more means for guiding the first jaw (2) and the second jaw (3) during relative substantially linear displacement such as to substantially prevent relative non-linear displacement of the opposing contact surfaces (8, 9); and means for delimiting the substantially linear displacement of the opposing contact surfaces (8, 9) of the first jaw (2) and second jaw (3) to the position of maximum separation.



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*